

⚠ WARNINGS ⚠

RISK OF ELECTRIC SHOCK

- To comply with all safety standards, the product must be used only for the purpose described in this instruction and must be installed in accordance with the wiring rules and regulations in the location where it is installed.
 - Do not open this product, there are no user serviceable parts inside.
- Failure to follow these instructions can result in serious injury or death.**

CAUTION


CAUTION: RISK OF BURN INJURIES.

- During and after use the unit may be hot. Do not touch the unit before it has completely cooled down.
- Failure to follow these instructions can result in minor injuries or equipment damage.**

GENERAL INFORMATION

- Check whether the product has been damaged during transport. Do not operate/install any product that appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement if any issues are discovered.
- Take care not to pull any electrical wires during unpackaging as this may damage the connection.
- This product can be used in damp locations.
- This product is designed for operation between 110-130VAC, 50/60Hz supply.
- Do not touch the lamp while in use or just after use as there is a risk of being burnt.
- Do not cover the lamp with any material while it is in use.
- Do not place the lamp on any flammable materials.
- This lamp should be cleaned with a damp cloth and dried with a lint free cloth or towel.
- Do not look directly at the lamp as it is plugged in. The lamp does not have an on/off switch and it will illuminate immediately.

FLEXIBLE DESIGN

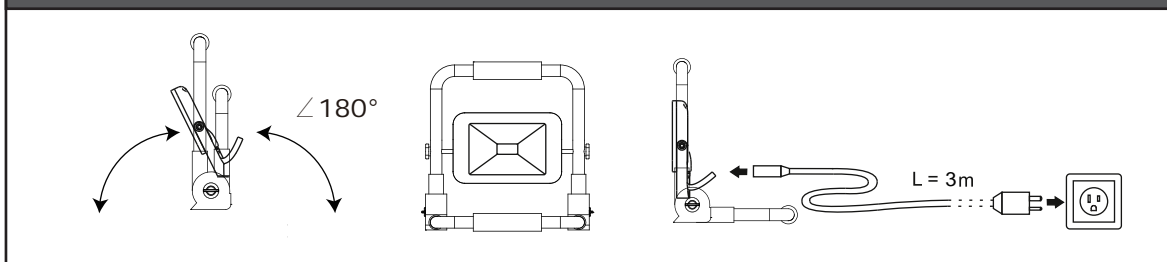

SPECIFICATIONS

Voltage.....	110-130VAC, 50/60Hz	Beam Angle.....	110°
Wattage.....	20W	CRI.....	>70%
CCT.....	6500K	Operating Temperature.....	-20° to 40° C
Lumens.....	1850Lm	Storage Temperature.....	-40° to 80° C
IP Rating.....	IP65	Warranty.....	3 Years
ETL Listed			