



Traffic Advisor™

Directional Lighting

Whelen's Traffic Advisor light arrays are designed to safely direct approaching traffic on the back of the vehicle. Straight or arrow style models are available with fully encapsulated lightheads and hard-coated lenses for optimal durability.

FEATURES

- Black extruded aluminum housing
- Hard-coated lenses minimize environmental damage from sand, sun, salt, and road chemicals
- Lightheads are fully encapsulated for moisture, vibration, and corrosion resistance
- Left arrow, right arrow, split arrow, and warning functions
- Rear dip switch provides eight flash patterns
- Hi/Low intensity control
- Five year warranty



Traffic Advisor™ - Straight Style

- Interior or exterior applications
- 15' cable standard, alternate cable lengths available, contact factory

DTAW8



DPTA8



Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length
DTA6A	Dominator™ TIR3™ Super-LED®	6	20'	No	Slide bolt	Requires customer supplied switches or optional TADCTL1	12	1.5" (3.8cm) H x 2.31" (5.9cm) W	23.25" (59cm)
DTA6		6							30.375" (77cm)
DTA8A		8							
DTA8		8							
DTAW8		8		Yes, Red, Blue and/or Amber					
D*	TIR3 Super-LED Lighthouse, Amber, Blue, Red or White								
DPTA6A	Dominator LINZ6™ Super-LED	6	20'	No	Slide bolt	Requires customer supplied switches or optional TADCTL1	12	1.5" (3.8cm) H x 2.31" (5.9cm) W	23.25" (59cm)
DPTA6		6							30.375" (77cm)
DPTA8A		8							
DPTA8		8							
DPTAW8		8		Yes, Red, Blue and/or Amber					
DP*	LINZ6 Super-LED Lighthouse, Amber, Blue, Red or White								

TAM83RB



TAZ86RB



Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length
TAM63	TIR3, Three Super-LED lighthoods per panel	6	15'	No	Slide bolt	TACTL5 included	12	1.74" (44mm) H x 2.17" (55mm) D	23.26" (59cm)
TAM83		8		Yes, Red, Blue and/or Amber					30.36" (77cm)
TAM83**				No					48" (122cm)
TAM8348		No		23.26" (59cm)					
TAZ66	LINZ6, Six Super-LED lighthoods per panel	6	20'	No	Slide bolt	TACTL5 included	12	1.74" (44mm) H x 2.17" (55mm) D	23.26" (59cm)
TAZ86		8		Yes, Red, Blue and/or Amber					30.36" (77cm)
TAZ86**				Yes, Red, Blue and/or Amber					30.36" (77cm)

TAL65



TAL85



Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length
TAL65	500 Series 5 mm LED	6	15'	No	Surface / rear PEM nuts/ thru-bolt endcaps	TACTL5 included	12 or 24	2.84" (73mm) H x 2.25" (57mm) D	36" (91cm)
TAL85		8							46.82" (119cm)

TAM65



TAM85 / TAM85AA



Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length
TAM65	500 Series TIR6™ Super-LED	6	15'	No	Surface / rear PEM nuts/ thru-bolt endcaps	TACTL5 included	12	2.84" (73mm) H x 2.25" (57mm) D	36" (91cm)
TAM85		8							Yes, Red, Blue and/or Amber
TAM85**				Yes, Red, Blue and/or Amber					

* Replace with A=Amber, B=Blue, R=Red, C= White ● ● ● ○

⚠ WARNING: These products may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit whelen.com/regulatory.





Model	Technology	Modules	Cable	End Flasher	Mount	Control Head	VDC	Size	Length
TA4437M	500 Series TIR6™ Super-LED®	8	15'	No	Rectangular aluminum housing, two piece	TACTL5 included	12	2.46" (6.24 cm) H x 4.41" (11.2 cm) D	21.875" (55.56 cm)
TA4437M1			30'						
TA4437M2			50'						
TA45B72	700 Series Linear-LED® Super-LED		35'		Carriage bolts with stainless steel hardware, surface mount			4.35" (88.9 cm) H x 4.17" (10.59 cm) D	72" (182.88 cm)

TAC8 Series



- Eight front-loaded Super-LED modules
- Built-in left arrow, right arrow, split arrow, and warning functions
- Includes nine directional sequences and nine Scan-Lock® flash patterns
- LED modules are sealed units (IP67 rated)
- Control head features an auxiliary control for a device up to 6A
- Available with a 15', 30', or 50' cable

Model	Technology	Modules	Cable	Mount	Control Head	VDC	Size	Length
TAC815	TAC8 Series Super-LED	8 Front Load	15'	Slide bolt via top, rear, or bottom channel	TAC8 included	12	Light array: 2" (50mm) H x 2-5/8" (67mm) D Control head: 3" (76mm) H x 5-7/8" (149mm) W x 7/8" (22mm) D	47.75" (121cm)
TAC830			30'					
TAC850			50'					

Straight Style - Front Load



Model	Technology	Modules	Cables	End Flasher	Mount	Control Head	VDC	Size	Length
TANF65	500 Series Linear-LED	6	15'	No	Surface/ slide bolt	TACTL5 included	12	2.38" (60mm) H x 2-3/8" (60mm) D	34" (86cm)
TANF85		8	(optional custom lengths available)	Yes, Red, Blue and/or Amber					45.12" (115cm)
TANF85**	CON3™ Super-LED	8		No					
TACF85				Yes, Red, Blue and/or Amber					
TACF85**									

Front Load DUO™ Color



Model	Technology	Modules	Cables	End Flasher	Mount	Control Head	VDC	Size	Length
TADF6	DUO™ Color Linear Super-LED®	6	20'	No	4 stainless steel slide bolts with hardware to surface mount	No special control head required	12	2.35" (59mm) H x 2.38" (60mm) D	37" (94cm)
TADF8		8							45.12" (115cm)
TDP\$S\$S\$0		6 or 8							-


* Replace with A=Amber, B=Blue, R=Red, C= White

§ Replace each "\$" symbol in the model number with the total number of each warning DUO Color module needed, in the order of Red-Amber / Blue-Amber / Amber-Amber / White-Amber



WARNING: These products may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit whelen.com/regulatory.



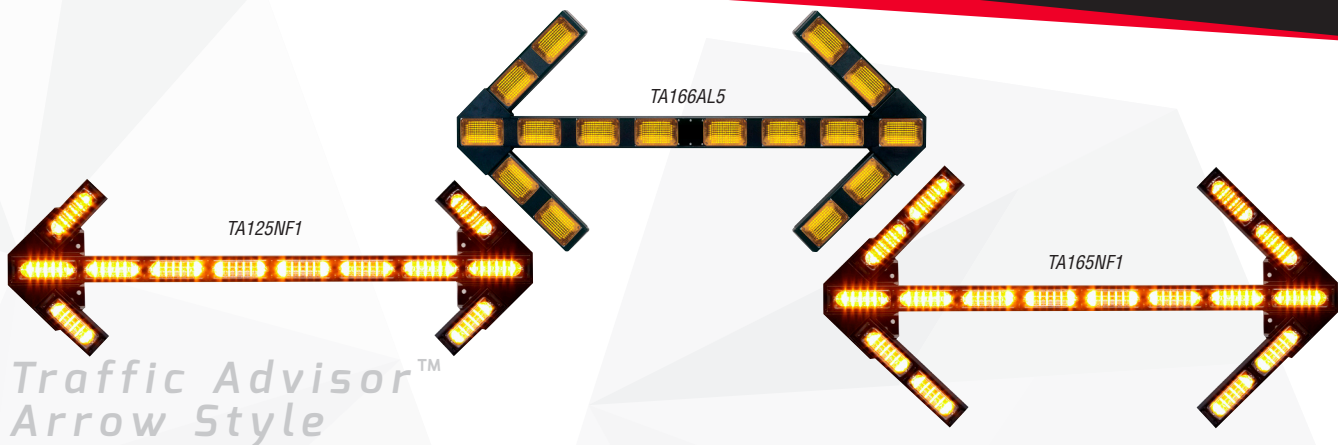

Traffic Advisor™ Arrow Style

Model	Technology	Modules	Connectors	Cable	Mount	Control Head	VDC	Size
TA125NF1	500 Series Front Load Amber Linear Super-LED®	12	Waterproof Deutsch	26'	Surface mount/ slide bolt	TACTL6 included	12	15" (381mm) H x 3.5" (89mm) D x 46" (117cm) L
TA125NF2				51'				23" (584mm) H x 3.5" (89mm) D x 46" (117cm) L
TA165NF1				26'				23" (584mm) H x 3.5" (89mm) D x 46" (117cm) L
TA165NF2	600 Series Amber 5mm LED	16	Waterproof	51'				36.5" (927mm) H x 4" (102mm) D x 5.5" (167.5cm) L
TA166AL5				51'				36.5" (927mm) H x 4" (102mm) D x 5.5" (167.5cm) L

Substitute Cables

Replaces Standard Length Cables, Not for use in Sequence to Solid or Sequence On/Off Flash Patterns

Model	Description
STA155	TA166AL5 - substitute 55' cable for standard 51' cable
STA235	TAL65/TAM65 - substitute 35' cable for standard 15' cable
STA245	TAL65/TAM65 - substitute 45' cable for standard 15' cable
STA255	TAL65/TAM65 - substitute 55' cable for standard 15' cable
STA335	TAL85/TAM85 - substitute 35' cable for standard 15' cable
STA345	TAL85/TAM85 - substitute 45' cable for standard 15' cable
STA355	TAL85/TAM85 - substitute 55' cable for standard 15' cable
STA445	TA45B72 - substitute 45' cable for standard 35' cable
STA455	TA45B72 - substitute 55' cable for standard 35' cable
STA535	TAM63/TAM83/TAZ66/TAZ86 - substitute 35' cable for standard 15' cable
STA545	TAM63/TAM83/TAZ66/TAZ86 - substitute 45' cable for standard 15' cable

Model	Description
STA555	TAM63/TAM83/TAZ66/TAZ86 - substitute 55' cable for standard 15' cable
STA635	TAD6/TAD8/TADP6/TADP8 - substitute 35' cable for standard 15' cable
STA735	TADF6/TADF8 - substitute 35' cable for standard 15' cable
STA745	TADF6/TADF8 - substitute 45' cable for standard 15' cable
STA755	TADF6/TADF8 - substitute 55' cable for standard 15' cable
STA835	TACF85/TANF65/TANF85 - substitute 35' cable for standard 15' cable
STA845	TACF85/TANF65/TANF85 - substitute 45' cable for standard 15' cable
STA855	TACF85/TANF65/TANF85 - substitute 55' cable for standard 15' cable
STA935	TACF85**/TANF85** - substitute 35' cable for standard 15' cable
STA945	TACF85**/TANF85** - substitute 45' cable for standard 15' cable
STA955	TACF85**/TANF85** - Substitute 55' Cable for Standard 15' Cable

Accessories

Model	Description
TACTL5	Control head only, programmable for 6 or 8 lamp halogen or LED Traffic Advisor, includes auxiliary On/Off switch
TACTL6	Control head only, programmable for 16 lamp halogen or LED Traffic Advisor, includes auxiliary On/Off switch. Meets federal standards
TADCTL1	TAD/TADP Dominator Traffic Advisor Series control head only
TADSW1	On/Off non-lighted, SPDT 20 amp switch, TADCTL1 control head
TADSW2	On/Off/On non-lighted, SPDT 20 amp switch, for TADCTL1 control head
TANBKT1	Mount for top of vehicle for TACF85 and TANF85 horizontal mount

* Replace with A=Amber, B=Blue, R=Red, C= White ● ● ● ○

WARNING: These products may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit whelen.com/regulatory.

WHELEN®

51 Winthrop Road
Chester, Connecticut 06412-0684
(860) 526-9504 www.whelen.com

Whelen Engineering reserves the right to upgrade and improve products without notice.
© 2019 Whelen Engineering Company, Inc. Printed in U.S.A.
NASCAR® is a registered trademark of the National Association for Stock Car Auto Racing, Inc.
Code No. 13316C - 09/25/2019

WHELEN®

OFFICIAL WARNING LIGHTS



All products proudly designed, manufactured,
and assembled in the U.S.A.
• ISO 9001 Registered QMS