




Very Well Connected™

INSTALLATION INSTRUCTIONS

Product 7160-0326, 7160-0353, 7170-0137, 7170-0564	Revision Rev.L	Form INST-516
Description - Charger Console 2011+		Printing Spec: PS-001

NOTE: ARMREST AND CUP HOLDER SHOWN FOR REF. ONLY

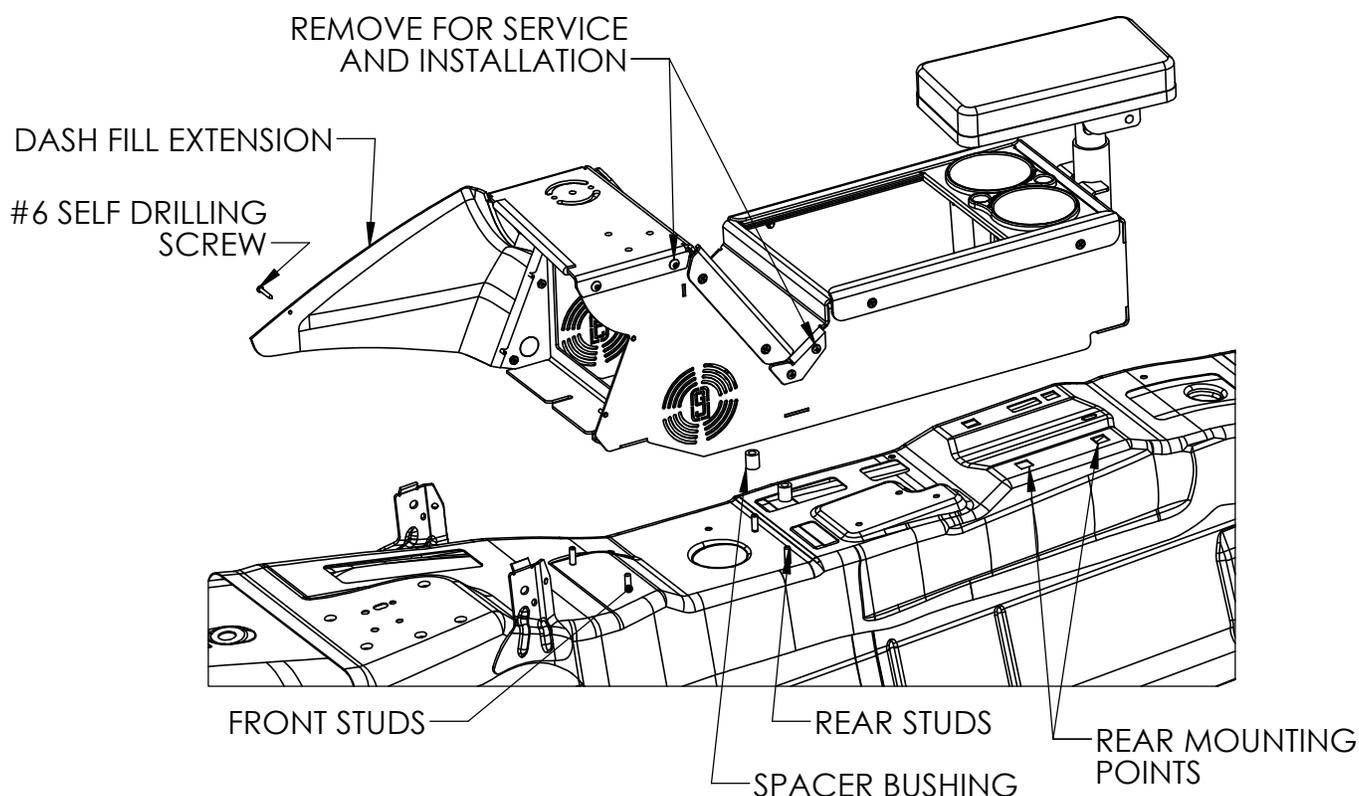

1. Before installing console into vehicle, unpack and install the Dash Fill Extensions (one per side) to the console box using the provided #6-32 nylock nuts (3 per side).
2. Remove factory console and/or top plate from vehicle.
3. Disconnect the factory harness and remove the low frequency antenna (LFA) from the stock plastic center console if applicable (SEE PAGE 3).

Product Mounting Disclaimer


Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2012 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

Installing USB/MP3 Jack (optional)

1. Remove USB/MP3 box from factory console by depressing tabs on either side.
2. Remove the knockout from the right side of the console box.
3. Snap the USB/MP3 box into the opening in the console box.

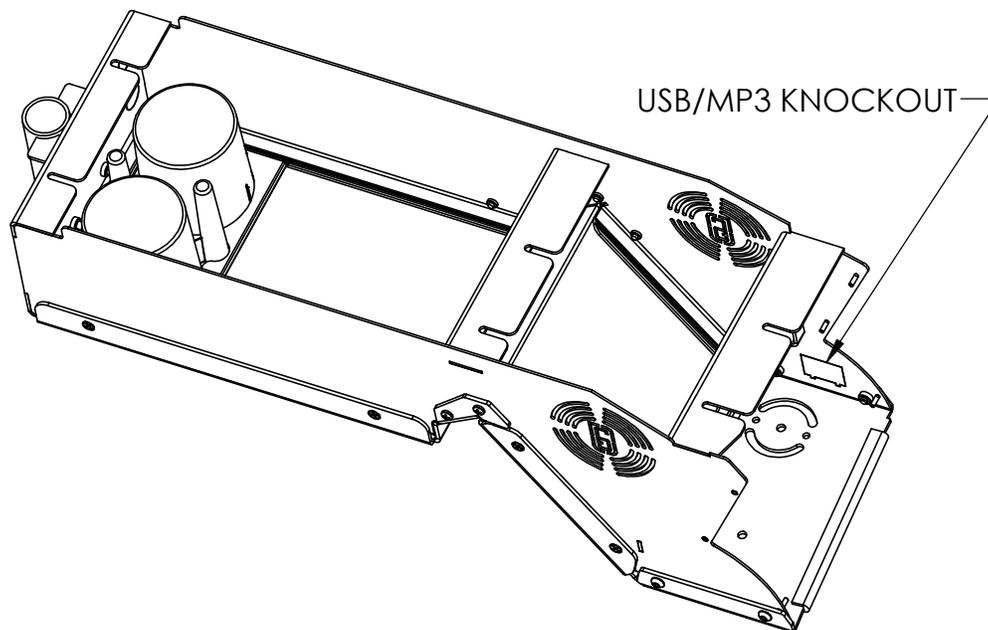

4. 2013 to current models, the low frequency antenna is mounted on a bracket which is mounted to the front two studs. When installing the console, remove the bracket, install the console and then install bracket and antenna.
5. Connect the harness between the LFA, USB/MP3 box and 12v jack if used.
6. Place Spacer Bushings over rear studs on the transmission tunnel.
7. OPTIONAL Remove knockout on lower right hand side of the box and install provided 12V jack. Install ground and power as required.
8. Slide console into vehicle. Downward pressure may be required on the front of the box to allow it to slide under the instrument panel.
9. Secure console with OEM nut and provided M6 nuts, washers and lock washers on front two brackets and provided 1/4-14 x 1.0" sheet metal screws at rear attachment points. Some of the vinyl flooring may need to be cut to reveal the rear mounting points.
10. Install the armrest (7160-0327, 7160-0347 & 7160-0354) into the tube and adjust to desired height/orientation then tighten the bolt under the armrest. Note Armrest is not included with 7160-0326 or 7160-0353 but can be ordered separately.
11. The cup holder (7160-0327) can be placed anywhere along the horizontal length of the box. Note cup holder is not included with 7160-0326 or 7160-0353 but can be ordered separately.
12. Once the console box is secure, drive a self tapping screw (provided in hardware bag) through the hole in the dash filler panels to secure them to the instrument panel. Note Be careful not to over tighten the self tapping screw.
13. If required, the Top Plate and the Center Brace can be removed to allow easier access for mounting and/or cable routing. If either item is removed Gamber-Johnson recommends reinstalling the flat head screws with a drop of Blue 242 Loctite to prevent loosening. Torque top plate bolts to 65-80 in-lbs when reinstalling.